

ADDENDUM No. 1

issue date August 30, 2024

The following clarifications, amendments, deletions, additions, revision and/or modifications are made a part of the contract documents and change the original documents only in the manner and to the extent hereinafter stated and shall be incorporated in the contract documents.

The provisions of this addendum shall take precedence over the requirements of the original contract documents, and all BIDDERS ARE REQUESTED TO ACKNOWLEDGE SAID PROVISIONS IN THE SUBMISSION OF THEIR BID.

Addendum as follows:

1. The receipt of bid date is hereby changed to 10:00 AM, September 11, 2024.
2. Attached please find a new set of bid forms for the BASE BID and the Supplemental Bid Items.

Please note supplemental items have been prepared to enable the engineer to adjust quantities, or for the addition of bid items not previously part of the base bid. Bids are to be prepared using the bid documents provided with the plans and specifications provided by Action and Civil Engineers, PLLC.

3. Provided for your use is a typical Air & Vacuum release valve assembly referencing an APCO air release valve product housed in a 24-inch HDPE pipe with a standard ring and cover at grade; also, a typical flushing valve unit assembly, all items of which should be included in the unit price bid for said item.

ACKNOWLEDGMENT:

The contractor must sign, date, and include this addendum with bid submission.

Signature of authorized representative and date.

PROPOSAL
WEST JEFFERSON COUNTY MUNICIPAL WATER DISTRICT
WATER DISTRIBUTION SYSTEM IMPROVEMENTS

ACE Job No. 123-01A

NO.	ITEM	UNIT	QUANTITY	UNIT PRICE BID WRITTEN IN WORDS		UNIT PRICE WRITTEN IN FIGURES		TOTAL PRICE BID WRITTEN IN FIGURES	
				DOLLARS	CENTS	DOLLARS	CENTS	DOLLARS	CENTS
1.	10" PVC WATERLINE - SDR 26 CL.160 - CUT 0' - 5'	L.F.	14,550						
2.	10" GATE VALVE W/ VALVE BOX - AMERICAN 2506, CRS, D.I., M.J.	EA.	15						
3.	DIRECTIONAL BORE FOR 10" WATERLINE USING HDPE EQUIVALENT UNDER PIPE LINES, ROADWAYS AND CONCRETE DRIVES	EA.	620						
4.	10" - 45 DEGREE D.I., M.J. ELL - RESTRAIN W/ "MEGA LUGS"	EA.	22						
5.	AIR/VACUUM RELEASE VALVE (BELOW GRADE) -AVONDALE OR EQUIVALENT W/ VALVE BOX (see detail)	EA.	8						
6.	STANDARD FLUSHING VALVE - RESTRAIN W/ "MEGA LUGS", M.J. [CONTRACTOR PLACED; locations to be determined]	EA.	8						
7.	CONNECT PROPOSED 10" WATERLINE TO EXISTING 10" WATERLINE, REMOVE EXISTING PLUG AND SALVAGE. MATERIALS & LABOR	L.S.	2						
8.	BORE FOR 10" WATERLINE UNDER PIPE LINES OR CONCRETE DRIVE	L.F.	250						
9.	TRENCH SAFETY EXCAVATION - CUT 0' - 5'	L.F.	14,550						

PROPOSAL
WEST JEFFERSON COUNTY MUNICIPAL WATER DISTRICT
WATER DISTRIBUTION SYSTEM IMPROVEMENTS

ACE Job No. 123-01A

NO.	ITEM	UNIT	QUANTITY	UNIT PRICE BID WRITTEN IN WORDS		UNIT PRICE WRITTEN IN FIGURES		TOTAL PRICE BID WRITTEN IN FIGURES	
				DOLLARS	CENTS	DOLLARS	CENTS	DOLLARS	CENTS
10.	TRENCH SAFETY SPECIAL SHORING	S.F.	400						
11.	TRENCH SAFETY PLAN - CONTRACTORS RESPONSIBILITY	L.S.	1						
12.	TRACER WIRE FOR WATERLINE WITHIN TXDOT OR COUNTY R.O.W. (14 GAUGE)	L.F.	14,550						
13.	MOBILIZATION / DEMOBILIZATION	L.S.	1						
14.	FINAL CLEAN UP	L.F.	14,550			TOTAL			\$
	STATEMENT FOR SEPARATED CONTRACT COMPLIANCE:								
	NON-CONSUMABLE MATERIALS AND EQUIPMENT.....								
	SKILLED LABOR, MATERIALS, EQUIPMENT AND TOOLS.....								
						TOTAL			\$

PROPOSAL
WEST JEFFERSON COUNTY MUNICIPAL WATER DISTRICT
WATER DISTRIBUTION SYSTEM IMPROVEMENTS

ACE Job No. 123-01A

NO.	ITEM	UNIT	QUANTITY	UNIT PRICE BID WRITTEN IN WORDS		UNIT PRICE WRITTEN IN FIGURES		TOTAL PRICE BID WRITTEN IN FIGURES	
				DOLLARS	CENTS	DOLLARS	CENTS	DOLLARS	CENTS



SUPPLEMENTAL ITEMS PROPOSAL
WEST JEFFERSON COUNTY MUNICIPAL WATER DISTRICT
Waterline along Major Drive from I-10, past Steinhagen
 American Rescue Plan Act

ACE Job No. 123-01A

NO.	ITEM	UNIT	QUANTITY	UNIT PRICE BID WRITTEN IN WORDS		UNIT PRICE WRITTEN IN FIGURES		TOTAL PRICE BID WRITTEN IN FIGURES	
				DOLLARS	CENTS	DOLLARS	CENTS	DOLLARS	CENTS
1.	MAN HOURS	HOUR	10						
2.	TRUCK HOURS	HOUR	10						
3.	BACK HOE / LOADER HOUR	HOUR	10						
4.	EXTRA CLASS A CONCRETE - BULK	C.Y.	10						
5.	EXTRA CLASS A CONCRETE - FORMED	C.Y.	10						
6.	METER BOX DFW-D-1200	EA.	1						
7.	SERVICE CLAMP 3/4" OR 1"	EA.	1						
8.	10" D.I. MJ TEE Restrain with mega lugs	EA.	10						
9.	Cement stabilized sand backfill	TON	10						
10.	610 rock - truck measure	TON	40						
11.	EXTRA CLASS A CONCRETE-BULK	C.Y.	10						
12.	EXTRA CLASS A CONCRETE-FORMED	C.Y.	10						
13.	UNSPECIFIED DUCTAL IRON FITTINGS- INSTALLED	LB.	500						
14.	4 FOOT BARBED WIRE FENCE WITH POSTS - INSTALLED	L.F.	1,320						

NOTE:

1. PROVIDE MEDIUM DUTY ADJUSTABLE VALVE BOX W/ SLIP TYPE BOTTOM SECTION FOR ALL GATE VALVES, SUPPLIED TYLER PIPE OR APPROVED EQUIVALENT
2. A CONC. SLAB- 1'-6" SQUARE BY 6" THICK IS REQUIRED WHEN THE VALVE BOX IS NOT LOCATED IN A PAVED AREA.
3. THE CONTRACTOR SHALL PROVIDE THE NECESSARY FITTINGS TO ADJUST THE HYDRANT TO THE PROPER ELEVATION AND POSITION.
4. DRAIN HOLES IN HYDRANT SHOE MUST NOT BE BLOCKED.
5. PROVIDE FLUSH HYDRANT EXTENSION, IF NECESSARY.
6. PUMPER NOZZLE SHALL FACE ROADWAY. (4 1/2" N.T.S.)
7. COMPLETE FIRE HYDRANT UNIT CONSISTS OF ALL ITEMS IN DETAIL INCLUDING " MAIN LINE " X 6" SWIVEL / TEE

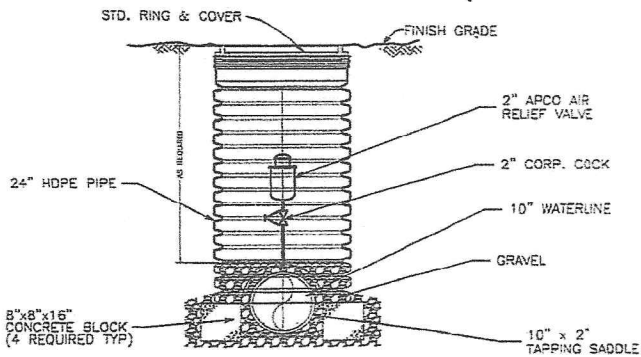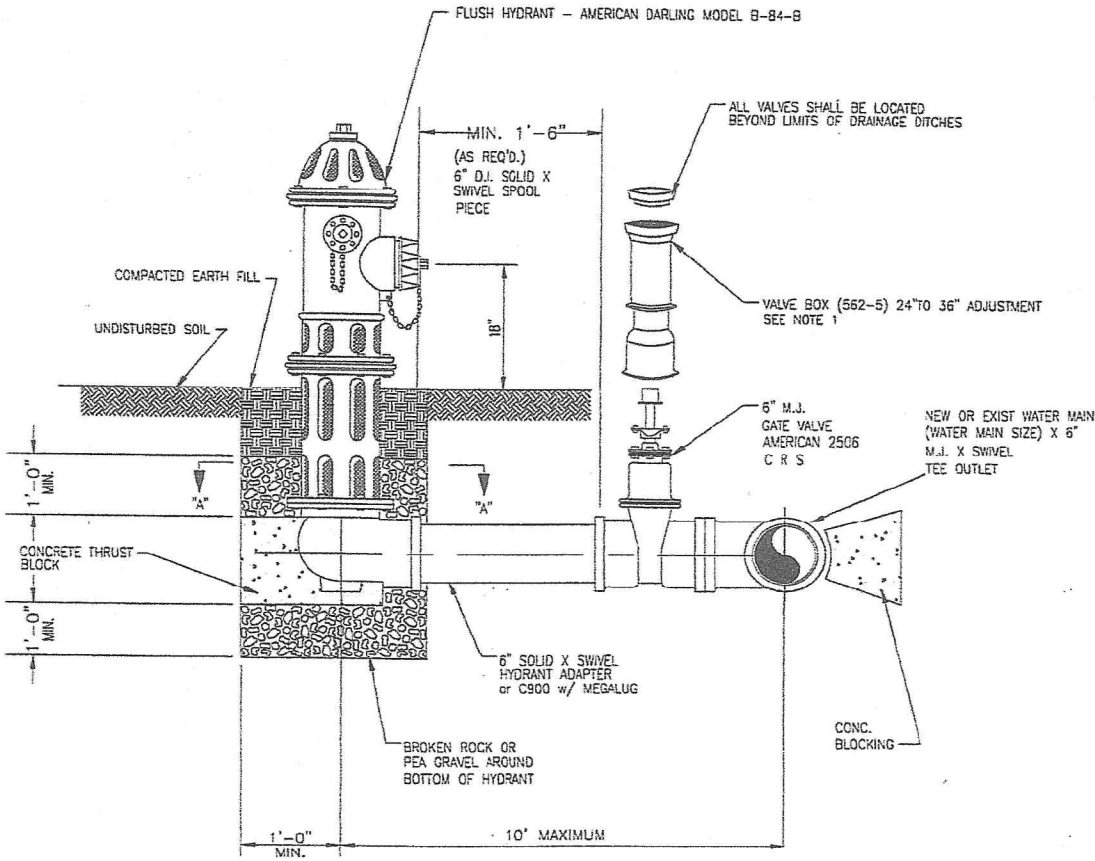

AIR & VACUUM RELEASE VALVE